



Dart Aerospace Ltd.
1270 Aberdeen St
Hawkesbury, ON
K6A 1K7
Canada

Tel (613) 632-5200

D350-636-011
Job Sheet 174844



Part No: D350-636-011

Job Qty: 1 ea

Part Name: Skidtube LH, Std Wearplates, DART (Apical) Cylindrical/Aerazur Float Comp.



Part Weight: 0 lbs

Status: Scheduled

Priority: Medium

Job Created: 3/22/18

Job Tracking No:

Due Date: 4/24/18

Created By: Michelle Gagnon-Donovan

Type: Stock

Description:

Note: D2750-041 REV G SHEETS 1,2,4,8 IPP Rev:I 02.09.25 IPP Rev:J 06-03-23 As per Rev D IPP Rev:K 06-07.13
As per dsi9343 IPP Rev:L 07-07-28 Added SS Wearplates(Rev E) JLM Ver:EC IPP Rev:M 08-04-22 DD
verified:EC IPP Rev:N 08-09-23 revF DD verified:ec IPP Rev:O 09-02-06 per PAR09-010 DD ver:EC IPP
Rev:P 10.06.22 revise seq110 DD ver:EC IPP Rev:Q 10.10.01 as per IIN revH DDver:EC IPP REV:R
13.08.27 PER ECN13-594 DD VERF:JLM

Ship Via:

Bill of Materials



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
CANADA
TEL.: 1 613 632-5200
Email: sales@dartaero.com
www.dartaerospace.com

Container No: S062467



Part: D350-636-011

Job No: 174844

Serial No/Batch: S062467

Revision:

Inspector:

Date: 04/18/18

2/18 9:45 AM Dart.Gagnon.Michelle

Job Routing

Op No	Operation	Qty	Start Date	Due Date	Standard		Workcenter/Supplier		Sign-off
					Setup hrs	Run Hrs	Workcenter / Supplier	Lead Time	
90	Start up Operation	1 Ea		4/23/18	0.00	0.00	Start Up Skidtubes-1		<i>MLG</i>
110	Skidtubes	1 pcs		4/23/18	0.00	4.55	Skidtubes-4		<i>BE DAS</i>
120	QC	1 pcs		4/23/18	0.00	0.00	QC10		<i>38 DAS</i>
130	QC	1 pcs		4/23/18	0.00	0.00	QC5		<i>9-88 38</i>
140	HandFinish	1 pcs		4/23/18	0.00	0.93	HandFinish1		<i>SA 18-04-24</i>
150	QC	1 pcs		4/23/18	0.00	0.00	QC7-2		<i>IN</i>
160	Skidtubes	1 pcs		4/23/18	0.00	4.55	Skidtubes-4		<i>MLG DAS 38 DAS</i>
170	QC	1 pcs		4/23/18	0.00	0.00	QC10		<i>38 DAS</i>
180	QC	1 pcs		4/23/18	0.00	0.00	QC5		<i>9-88 38</i>
190	HandFinish	1 pcs		4/23/18	0.00	0.93	HandFinish2		<i>BER 18-05-16</i>
200	SprayPaint	1 pcs		4/23/18	0.00	0.91	Spray Paint		<i>JMD 07/04/2018</i>
205	Outsource	1 pcs		4/23/18			ATE003-VC		<i>MLA</i>
210	QC	1 pcs		4/23/18	0.00	0.00	QC14		<i>ML 18-6-11</i>
230	HandFinish	1 pcs		4/24/18	0.00	0.93	HandFinish4		<i>ML 18-6-11</i>
240	QC	1 pcs		4/24/18	0.00	0.00	QC5		<i>38</i>
250	Packaging	1 pcs		4/24/18	0.00	0.00	Packaging1-3		<i>JUN 18 2018</i>
260	QC	1 pcs		4/24/18	0.00	0.00	QC4		<i>ML 18-6-11</i>
265	DC	1 pcs		4/24/18	0.00	0.00	DC		<i>ML 18-6-11</i>
270	Packaging	1 pcs		4/24/18	0.00	0.00	Packaging3-1		<i>ML 18-6-11</i>
280	QC21-FG	1 Ea		4/24/18	0.00	0.00	QC21		<i>21 JUN 25 2018</i>

Part Op 110 - 1- Pick D2600-3 Bent 2- Deburr FWD and AFT ends, remove bending marks. Scribe batch# inside AFT end per dwg
 Descriptions: D2750-1 3- Drill pilot holes for blade fitting bolt holes using DT8983. Start with 3/16", then open to 0.500" using center drill then ream holes using 0.500" reamer. PIN first side. Repeat process on second side. ***ENSURE PROPER POSITIONING FWD BEND MUST BE FACING UP WHEN DRILLING FIRST SIDE*** Drill pilot holes as per Dwg D2750 sheet 4 (D2750-1 details). Drill using drill Jig DT8150 & DT8863A for 2nd side only DT8863B for first side (detail B) 4- Locate DT8330 off of blade fitting bolt holes and drill pilot holes for blade fitting. Open to 0.500" using hole saw. VERIFY AND RECORD FWD BEND ANGLE. 5-Drill pilot holes for wearplates as per Dwg D2750 using DT8108 open to 0.297". 6- Open up holes of Detail A to 0.297" (total of 2 holes per side) 7-Weld D2744 Cap as per Dwg D2750 and QSI 004. Fill grooves in bend left from bending as per QSI 004 A/R Aluminum Rod batch: *038611* 8-Grind welds flush as per Dwg D2750
 160 - 1-Open up holes using hole saw of Detail C and ground handling to 0.625" (total of 8 holes per side) as per dwg D2750. 2-Open up holes using hole saw of Detail B to 0.750" (total of 4 holes per side) as per dwg D2750. 3- Open float hole using un-blt to 0.500" (4 per side) 4-Chamfer holes of Detail B, C, ground handling and float holes per dwg D2750 (welding instructions on sheet 8) 5-Deburr and blow out all chips from inside of tube 6- Prepare tube for welding, remove alodine as required. 7-Bond web D2739 in place as per QSI 015, let cure for 12hrs. A/R Sikaflex-291 batch: *138787* exp. date: *2004/12/20* **ATTN: USE I-BEAM LOCATION AID (BLADE FITTING)*** 8- Weld spacers D3490-1, D3490-3 and D2743 as per dwg D2750 & QSI004 (welding instructions on sheet 8) A/R Aluminum Rod batch: *038611* 9- At section AJ-AJ drill out x-bolt spacer to 0.404" 10-Grind welds flush as per Dwg D2750 11-Spot face ground handling holes section (total of 4 places per side) as per dwg D2750 12-Deburr holes, ensure tube is free of all scratches before sending to paint.
 180 - ***VERIFY C'BOARD IS GOOD***
 190 - Re-alodine tube as per QSI 005 section 4.1.2.1 do not acid etch.
 200 - 1- PRIME AS PER DWG AND QSI 005 4.2 PRIMER PRC DESOTO 515X349 BATCH: *138747* 2- PAINT WHITE AS PER DWG AND QSI 005 4.2 PAINT BATCH: *138863*
 210 - Inspect for foreign object per QSI 024
 230 - 1- Install inserts as per Dwg D2750 2-Inspect for Foreign Objects 3- Install blade fitting D3488-041, wearshoes and ground handling hardware as per dwg D2750 SIKA FLEX 241 BATCH: *ML138787* EXP DATE: *18/11/18* 4- Assemble o-ring to plug as per dwg D3492 and apply o-ring lube A/R 55-o-ring lube batch: *ML139243* 5- Coat all exposed fasteners with "LPS Procyon" batch: *ML133640*
 260 - *****ensure antiseize is on AN8C21A bolts*****
 265 - record fwd angle: *89.8°* Photocopy blue file and type labels per PPP D350-636-011 CHG 007
 270 - Package as per PPP D350-636-011 Location : FG072

Job BOM					003799
Part / Item	Component Name	Quantity	Operation	Container	
D2600-3-BENT-LH	Extrusion Bent LH	1 Ea (1 ea)	90-Start up Operation	5043955	
D2744	Cap	1 Ea (1 ea)	90-Start up Operation	5038835	
D2739	350 I-Beam	1 Ea (1 ea)	160-Skidtubes	5049088	
D2743	Crossbolt Spacer	8 Ea (8 ea)	160-Skidtubes	5051803	
D3490-1	Cross Bolt Spacer	4 Ea (4 ea)	160-Skidtubes	5039269	
D3490-3	Cross Bolt Spacer	4 Ea (4 ea)	160-Skidtubes	5066254	
AN3C5A	Bolt	34 Ea (34 ea)	230-HandFinish	505767	
AN3C6A	Bolt	4 Ea (4 ea)	230-HandFinish	5019397	
AN6C44A	Bolt	4 Ea (4 ea)	230-HandFinish	FM137055	
AN8C35A	Bolt	1 Ea (1 ea)	230-HandFinish	FM137202	
D2745	Bushing	8 Ea (8 ea)	230-HandFinish	5053253	
D3488-041	Blade Fitting LH	1 Ea (1 ea)	230-HandFinish	5079841	
D3492-1	Plug	8 Ea (8 ea)	230-HandFinish	5052900	
D3492-3	Plug	8 Ea (8 ea)	230-HandFinish	5067012	
D3535-25	Wearplate Center	1 Ea (1 ea)	230-HandFinish	5060747	
D3536-25	Gasket Center	1 Ea (1 ea)	230-HandFinish	5059811	
D3537-1	Wearpad	3 Ea (3 ea)	230-HandFinish	5045654	
D3631-1	Washer	8 Ea (8 ea)	230-HandFinish	5058407	
D3791-1	Wearpad	1 Ea (1 ea)	230-HandFinish	5059894	
D3793-1 5070803	Wearplate Fwd	1 Ea (1 ea)	230-HandFinish	5047272	
D3793-3	Wearplate Aft	1 Ea (1 ea)	230-HandFinish	5059813	
D3794-1	Gasket Fwd	1 Ea (1 ea)	230-HandFinish	5046313	
D3794-3	Gasket Aft	1 Ea (1 ea)	230-HandFinish	5076089	
MS21043-6	Nut	4 Ea (4 ea)	230-HandFinish	5048370	
MS21083C8	Nut	1 Ea (1 ea)	230-HandFinish	5056493	
NAS1149C0332R	Washer	38 Ea (38 ea)	230-HandFinish	FM138109-121	
NAS1149C0832R	Washer	1 Ea (1 ea)	230-HandFinish	5036714	
NAS1515H3L	Washer	4 Ea (4 ea)	230-HandFinish	5022098	
NAS1611-010	O-Ring	8 Ea (8 ea)	230-HandFinish	5034467	
NAS1611-013	O-Ring	8 Ea (8 ea)	230-HandFinish	5058138	
ALS4-1032-225	Rivnut	38 Ea (38 ea)	230-HandFinish		
AN8C21A	Bolt	2 Ea (2 ea)	250-Packaging	FM137162	
D2741	Replacement Blade	1 Ea (1 ea)	250-Packaging	5040883	
D3493-1	Washer	2 Ea (2 ea)	250-Packaging	5052854	
D3532-1	Spacer	2 Ea (2 ea)	250-Packaging	5062610	
MS21083C8	Nut	2 Ea (2 ea)	250-Packaging	5050046	
NAS1149D0863J	Washer	2 Ea (2 ea)	250-Packaging	FM137162	

Job Allocations

Operation	Component Part	Required	Inventory	Allocated
90-Start up Operation	D2600-3-BENT-LH	1	11	0
	D2744	1	15	0
160-Skidtubes	D2739	1	25	0
	D2743	8	201	0
	D3490-1	4	64	0
	D3490-3	4	47	0
	ALS4-1032-225	38	1,149	0
230-HandFinish	AN3C5A	34	191	0
	AN3C6A	4	330	0
	AN6C44A	4	407	0
	AN8C35A	1	63	0
	D2745	8	225	0
	D3488-041	1	9	0
	D3492-1	8	211	0
	D3492-3	8	144	0
	D3535-25	1	20	0
	D3536-25	1	34	0
	D3537-1	3	153	0
	D3631-1	8	59	0
	D3791-1	1	16	0
	D3793-1	1	20	0
	D3793-3	1	28	0
	D3794-1	1	16	0
	D3794-3	1	44	0
	MS21043-6	4	182	0
	MS21083C8	1	169	0
	NAS1149C0332R	38	4,898	0
	NAS1149C0832R	1	88	0
	NAS1515H3L	4	255	0
	NAS1611-010	8	389	0
	NAS1611-013	8	285	0
250-Packaging	AN8C21A	2	141	0
	D2741	1	67	0
	D3493-1	2	60	0
	D3532-1	2	38	0
	MS21083C8	2	169	0
	NAS1149D0863J	2	147	0

Part Specifications

Specifications could not be found.

Plex 3/22/18 9:45 AM Dart.Gagnon.Michelle

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER
NO. 174844
MAR 21 2018


RELEASED
2013-08-13
WP


QTY -041	QTY -042	QTY -043	QTY -044	PART NUMBER	DESCRIPTION
X				D2750-041	350 SKIDTUBE ASSEMBLY, LH
	X			D2750-042	350 SKIDTUBE ASSEMBLY, RH
		X		D2750-043	350 SKIDTUBE ASSEMBLY, LH
			X	D2750-044	350 SKIDTUBE ASSEMBLY, RH
1	1	1	1	D2739	WEB
8	8	8	8	D2743	SPACER
1	1	1	1	D2744	CAP
8	8	8	8	D2745	BUSHING
1				D2750-1	SKIDTUBE WELDMENT, LH
	1			D2750-2	SKIDTUBE WELDMENT, RH
		1		D2750-3	SKIDTUBE WELDMENT, LH
			1	D2750-4	SKIDTUBE WELDMENT, RH
1		1		D3488-041	BLADE FITTING, LH
	1		1	D3488-042	BLADE FITTING, RH
4	4	4	4	D3490-1	SPACER
4	4			D3490-3	SPACER
		4	4	D3490-5	SPACER
8	8	8	8	D3492-041	PLUG ASSEMBLY
8	8			D3492-043	PLUG ASSEMBLY
		8	8	D3492-045	PLUG ASSEMBLY
1	1	1	1	D3535-25	WEARSHOE
1	1	1	1	D3536-25	GASKET
3	3	3	3	D3537-1	WEARPAD
8	8	8	8	D3631-1	WASHER
1	1	1	1	D3791-1	WEARPLATE
1	1	1	1	D3793-1	WEARSHOE
1	1	1	1	D3793-3	WEARSHOE
1	1	1	1	D3794-1	GASKET
1	1	1	1	D3794-3	GASKET
38	38	38	38	ALS4-1032-225	INSERT (OR ALS7-1032-225, AKS4-1032-225, AELS-1032-225)
34	34	34	34	AN3C5A	BOLT
4	4	4	4	AN3C8A	BOLT
4	4	4	4	AN6C44A	BOLT
1	1	1	1	AN8C35A	BOLT
38	38	38	38	AN960C10L	WASHER
1	1	1	1	AN960C816L	WASHER
4	4	4	4	MS21043-6	NUT
1	1	1	1	MS21083C8	NUT
4	4	4	4	NAS1515H3L	WASHER

GENERAL NOTES:


- MATERIAL: MAKE D2750-1/-2/-3/-4 FROM D2600-3 EXTRUSION (INITIAL LENGTH = 120.0).
- FINISH: ACID ETCH, ALODINE ASSEMBLY PER DART QSI 005 4.1 PRIOR TO INSTALLING D2739 WEB.
STANDARD: PRIME (REF. 4.2.1.3.3) AND PAINT WHITE PER DART QSI 005 4.2
OPTIONAL: POWDER COAT WHITE (REF. 4.3.5.1) PER DART QSI 005 4.3
BLACK ANTI-SKID PAINT AS INDICATED TO 1.0 ABOVE SKIDTUBE CENTER-LINE PER DART 005 4.4 (OPTIONAL).
- TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- UNITS: INCHES UNLESS OTHERWISE NOTED
- BREAK SHARP EDGES: N/A
- IDENTIFICATION: N/A
- WEIGHT: D2750-041/-042/-043/-044 = 26.5 LBS
- WELD PER DART QSI 004
- INSTALL ALS4-1032-225 INSERTS AFTER FINISH AS INDICATED. DRILL 'F' SIZE HOLES (Ø0.297) FOR WEARSHOE INSERTS
- FINAL CONFIGURATION SHOULD HAVE THE FOLLOWING MINIMUM MECHANICAL PROPERTIES:
MINIMUM YIELD TENSILE STRENGTH = 35 KSI
MINIMUM ULTIMATE TENSILE STRENGTH = 38 KSI
- COAT ALL EXPOSED FASTENERS WITH LPS LABORATORIES "LPS PROCYON" AFTER FINAL ASSEMBLY, CLEAN EXCESS OFF FINISH WITH MEK DEGREASER.
- SPACER AND PLUG INSTALLED SAME AS SECTION AJ-AJ EXCEPT HORIZONTAL
- SPACER AND PLUG INSTALLED SAME AS SECTION AP-AP EXCEPT HORIZONTAL

G	CORRECTED TOLERANCE ON Ø0.500 THRU HOLE: IS +0.019/-0.000, WAS +0.100/-0.000 (ZN B3-4, B2-5); ADD VIEW TO CONTROL FWD BEND ORIENTATION (ZN D-1, A1-S1-6-7); UPDATED FINISH OPTIONS; INSIDE OF TUBE NO LONGER SPRAYED WITH LPS-3. REASON: PAR13-276 AND NCR13-2757	MB	13.07.11
F	INCORPORATE DSI 9413. QTY (3) D3537-1 WAS QTY (5) (ZN C8-1); D3791-1/3 REPLACES D3535-13-35 (ZN C8-1); D3794-1/3 REPLACES D3536-13-35 (ZN B8-1); ADD D3791-1 (ZN C8-1); WEARSHOE HOLES UNDER FWD/AFT SADDLE REMOVED (8 PL); WEARSHOE HARDWARE QTY UPDATED (ZN B8-1); D3488-041/-042 HARDWARE UPDATED (ZN C1-8, 9, 10, 11); ADD NOTE 12 AND 13 (ZN A6-1); REASON: REF. NCR 08-043	PH	08.07.16
E	CHANGE TO STAINLESS STEEL WEARPLATES. ADD RUBBER GASKETS. CHANGE INSERTS. ADD D3631-1; REMOVE QTY (38) NAS1515H3L; REMOVE QTY (10) NAS1515H8L; REMOVE D2741; QTY (2) AN960C816; REMOVE QTY (2) MS21063C8	CB	07.05.17
D	ADD HOLES AND SPACERS FOR APICAL FLOATS; INCORPORATE DEO 9133/9157	PH	06.01.05
C	ADD D2750-3/D2750-4; INCORPORATE D2738 AND D2740	CP	98.11.18
B	CHANGE MS24694-S293 TO AN8-16A	CP	98.09.01
A	NEW ISSUE	DS	98.04.16
REV.	DESCRIPTION	BY	DATE
DESIGN	MM	DART AEROSPACE USA, INC.	
DRAWN		KENT, WA	
CHECKED		DRAWING NO.	REV. G
MFG. APPR.		D2750	SHEET 1 OF 11
APPROVED		TITLE	SCALE
DE APPR.		350 SKIDTUBE ASSEMBLY	NTS
DATE	13.07.11	COPYRIGHT © 1998 BY DART AEROSPACE USA, INC.	

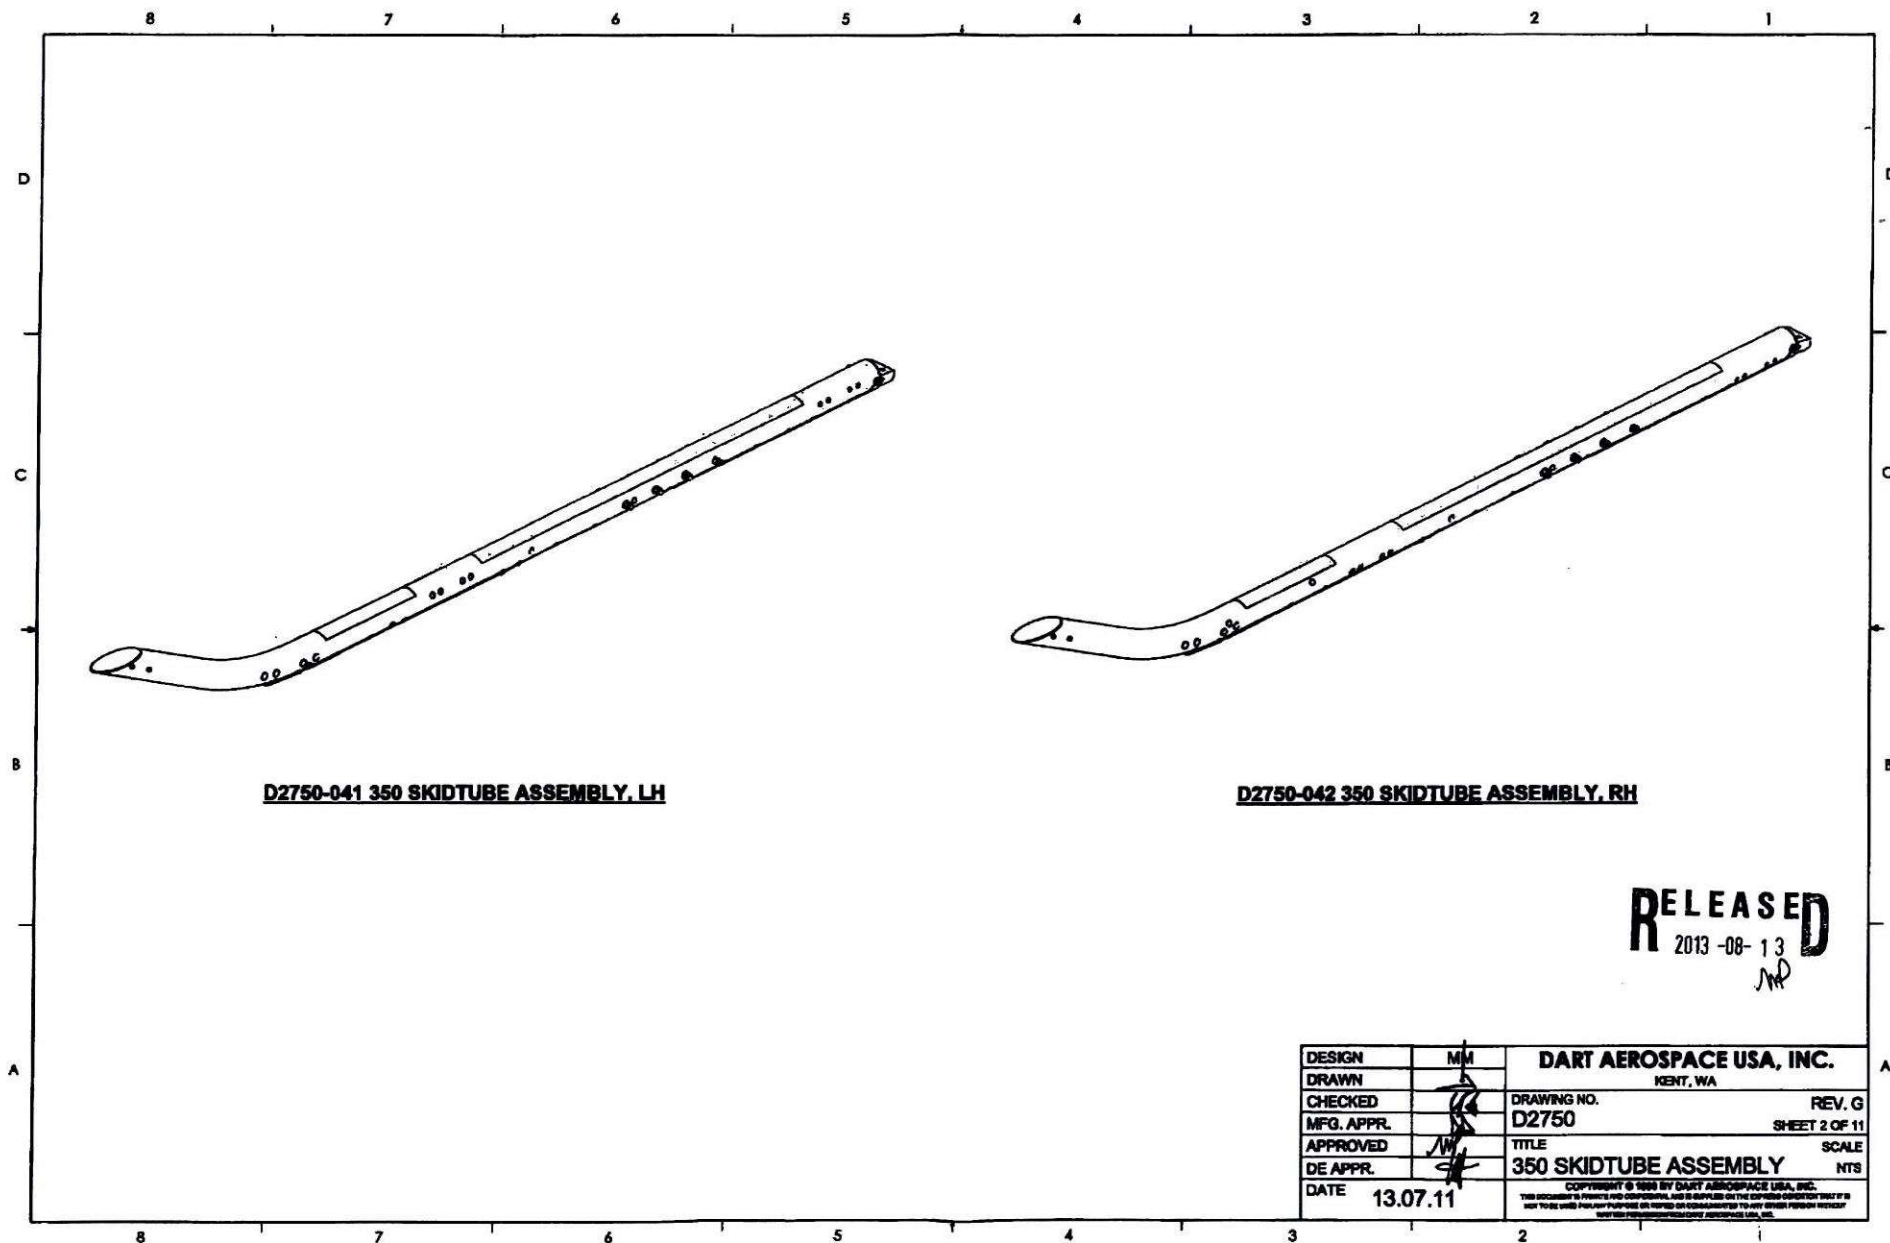

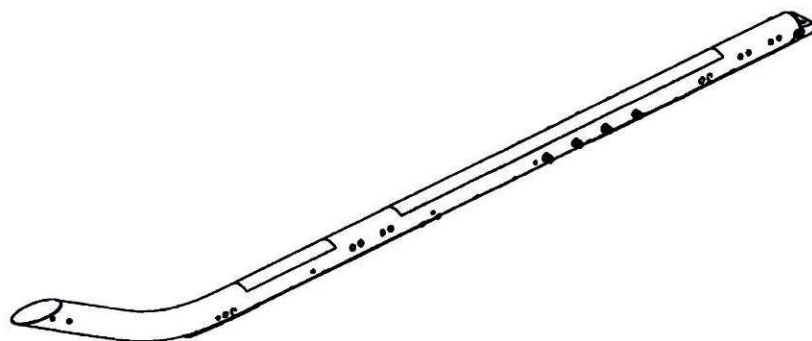



D2750-043 350 SKIDTUBE ASSEMBLY, LH

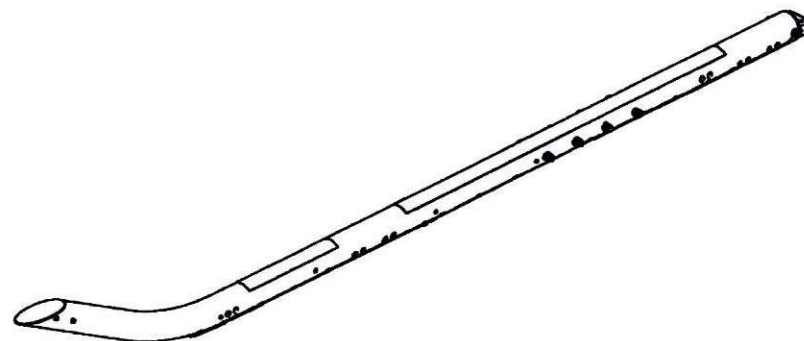


D2750-044 350 SKIDTUBE ASSEMBLY, RH

RELEASED
2013-08-13
ND


DESIGN	MM	DART AEROSPACE USA, INC.	
DRAWN	<i>[Signature]</i>	KENT, WA	
CHECKED	<i>[Signature]</i>	DRAWING NO. D2750	REV. G
MFG. APPR.	<i>[Signature]</i>	SHEET 3 OF 11	
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	350 SKIDTUBE ASSEMBLY	NTS
DATE	13.07.11	COPYRIGHT © 1986 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PREPARED AND SUPPLIED ON THE EXPRESS UNDERSTANDING THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR IN ANY MANNER WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	

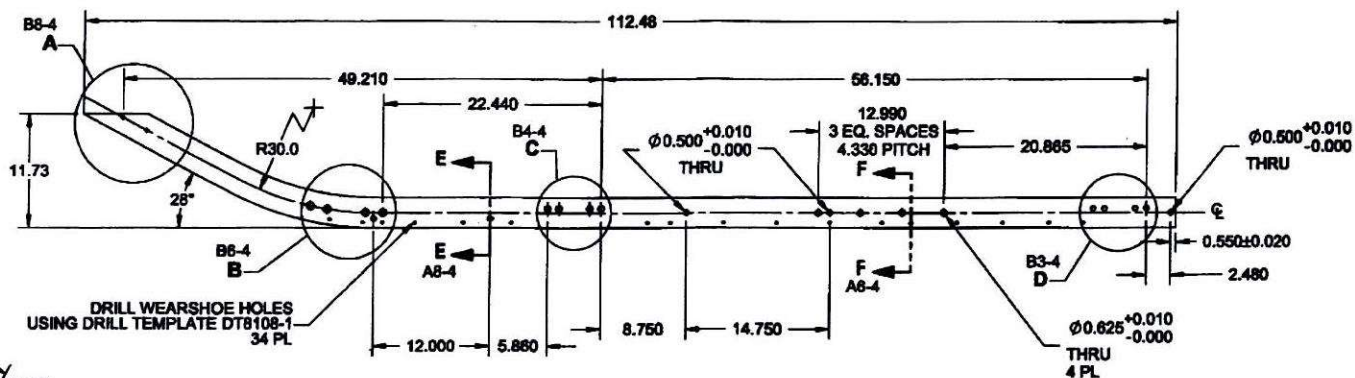


D2750-1 LH SKIDTUBE




DETAIL A
SCALE 2X

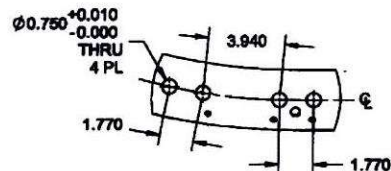


DETAIL B
SCALE 2X




DETAIL C
SCALE 2X




DETAIL D
SCALE 2X




SECTION E-E
SCALE 3X, 2 PL



SECTION F-F
SCALE 3X, 17 PL





SECTION G-G
SCALE 3X, 4 PL



SECTION H-H
SCALE 3X, 4 PL


RELEASED
2013-08-13

DESIGN	MM	DART AEROSPACE USA, INC.	
DRAWN		KENT, WA	
CHECKED		DRAWING NO. D2750	REV. G
MFG. APPR.		SHEET 4 OF 11	
APPROVED		TITLE	SCALE
DE APPR.		350 SKIDTUBE ASSEMBLY	NTS
DATE	13.07.11	COPYRIGHT © 1988 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS UNCLASSIFIED AND IS AVAILABLE FOR REPRODUCTION IN WHOLE OR IN PART FOR ANY PURPOSE OR FOR ANY OTHER REASON WITHOUT PERMISSION OF DART AEROSPACE USA, INC.	

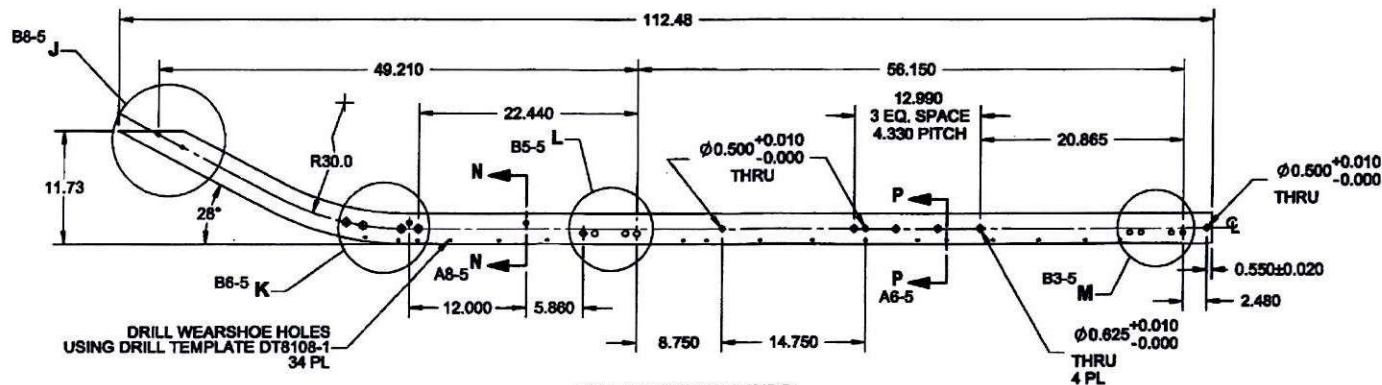


OUTBD


MAX ALLOWABLE
TWIST ON FWD BEND
(VIEWED LOOKING FWD)




DETAIL J
SCALE 2X

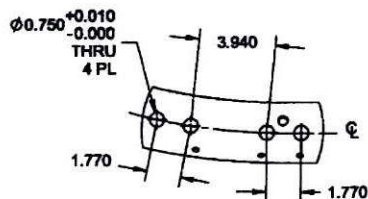


DETAIL K
SCALE 2X




DETAIL L
SCALE 2X




DETAIL M
SCALE 2X




SECTION N-N
SCALE 3X, 2 PL



SECTION P-P
SCALE 3X, 17 PL



SECTION Q-Q
SCALE 3X, 4 PL




SECTION R-R
SCALE 3X, 4 PL


RELEASED
2013-08-13

DESIGN	MM	DART AEROSPACE USA, INC.	
DRAWN		KENT, WA	
CHECKED		DRAWING NO. D2750	REV. G
MFG. APPR.			SHEET 5 OF 11
APPROVED		TITLE 350 SKIDTUBE ASSEMBLY	SCALE
DE APPR.			NTS
DATE	13.07.11	COPYRIGHT © 1999 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRELIMINARY AND NOT TO BE USED FOR ANY PURPOSE OR COPIED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	


8 7 6 5 4 3 2 1

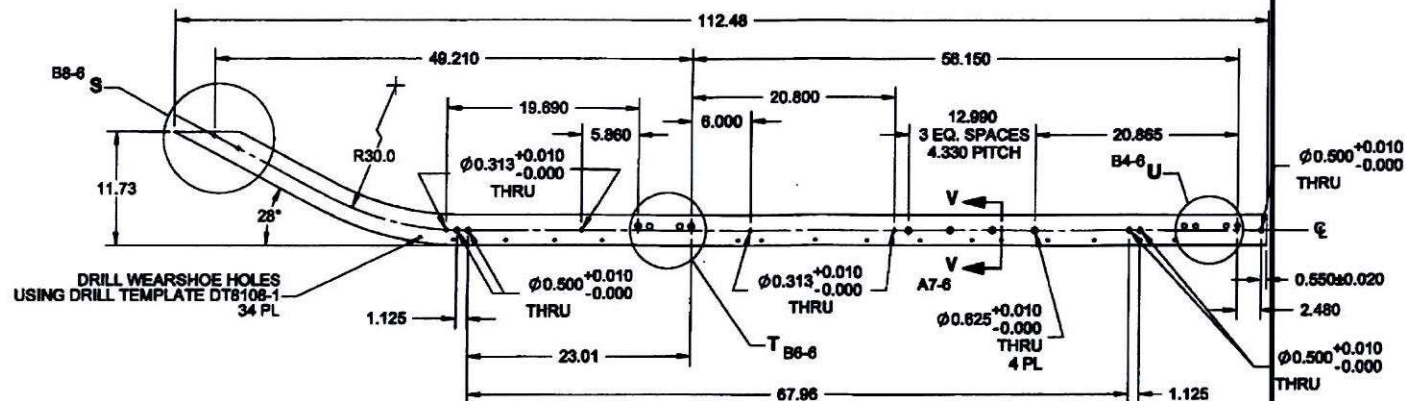


D2750-3 LH SKIDTUBE




DETAIL S
SCALE 2X




DETAIL T
SCALE 2X




DETAIL U
SCALE 2X



SECTION V-V
SCALE 3X, 17 PL



SECTION W-W
SCALE 3X, 4 PL



SECTION X-X
SCALE 3X, 4 PL

RELEASED
2013-08-13

DESIGN	MM	DART AEROSPACE USA, INC.	
DRAWN		KENT, WA	
CHECKED		DRAWING NO. D2750	REV. G
MFG. APPR.			SHEET 6 OF 11
APPROVED		TITLE 350 SKIDTUBE ASSEMBLY	SCALE NTS
DE APPR.			
DATE	13.07.11		


COPYRIGHT © 1988 BY DART AEROSPACE USA, INC.
THIS DRAWING IS THE PROPERTY OF DART AEROSPACE USA, INC. IT IS TO BE USED FOR THE PURPOSES FOR WHICH IT WAS DESIGNED AND FOR NO OTHER PURPOSES WITHOUT THE WRITTEN PERMISSION OF DART AEROSPACE USA, INC.

8 7 6 5 4 3 2 1


DART AEROSPACE USA, INC.		DESIGN	MM
DRAWING NO. D2750		CHECKED	
MFG. APPR.		APPROVED	
TITLE		DE APPR.	
350 SKIDTUBE ASSEMBLY		DATE	13.07.11
SCALE		REV. G	
SHEET 7 OF 11		REV. G	
NTS		REV. G	

RELEASED
2013-08-13
M


SECTION AF-AF
SCALE 3X, 4 PL




SECTION AE-AE
SCALE 3X, 4 PL




SECTION AD-AD
SCALE 3X, 17 PL




DETAIL AC
SCALE 2X





DETAIL AB
SCALE 2X





DETAIL AA
SCALE 2X



D2750-4 RH SKIDTUBE





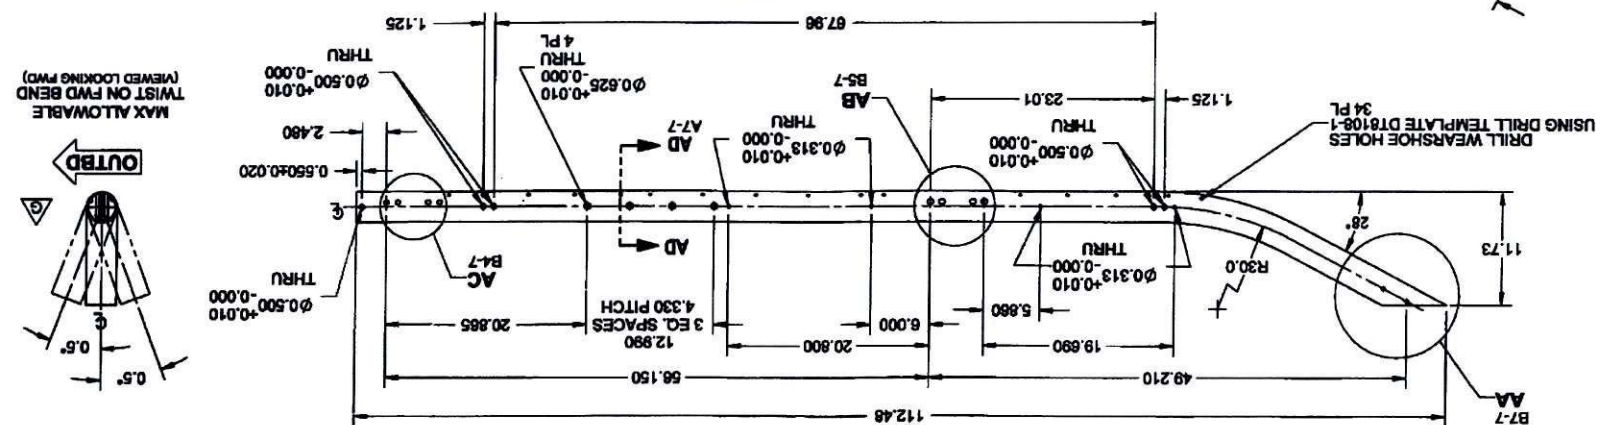


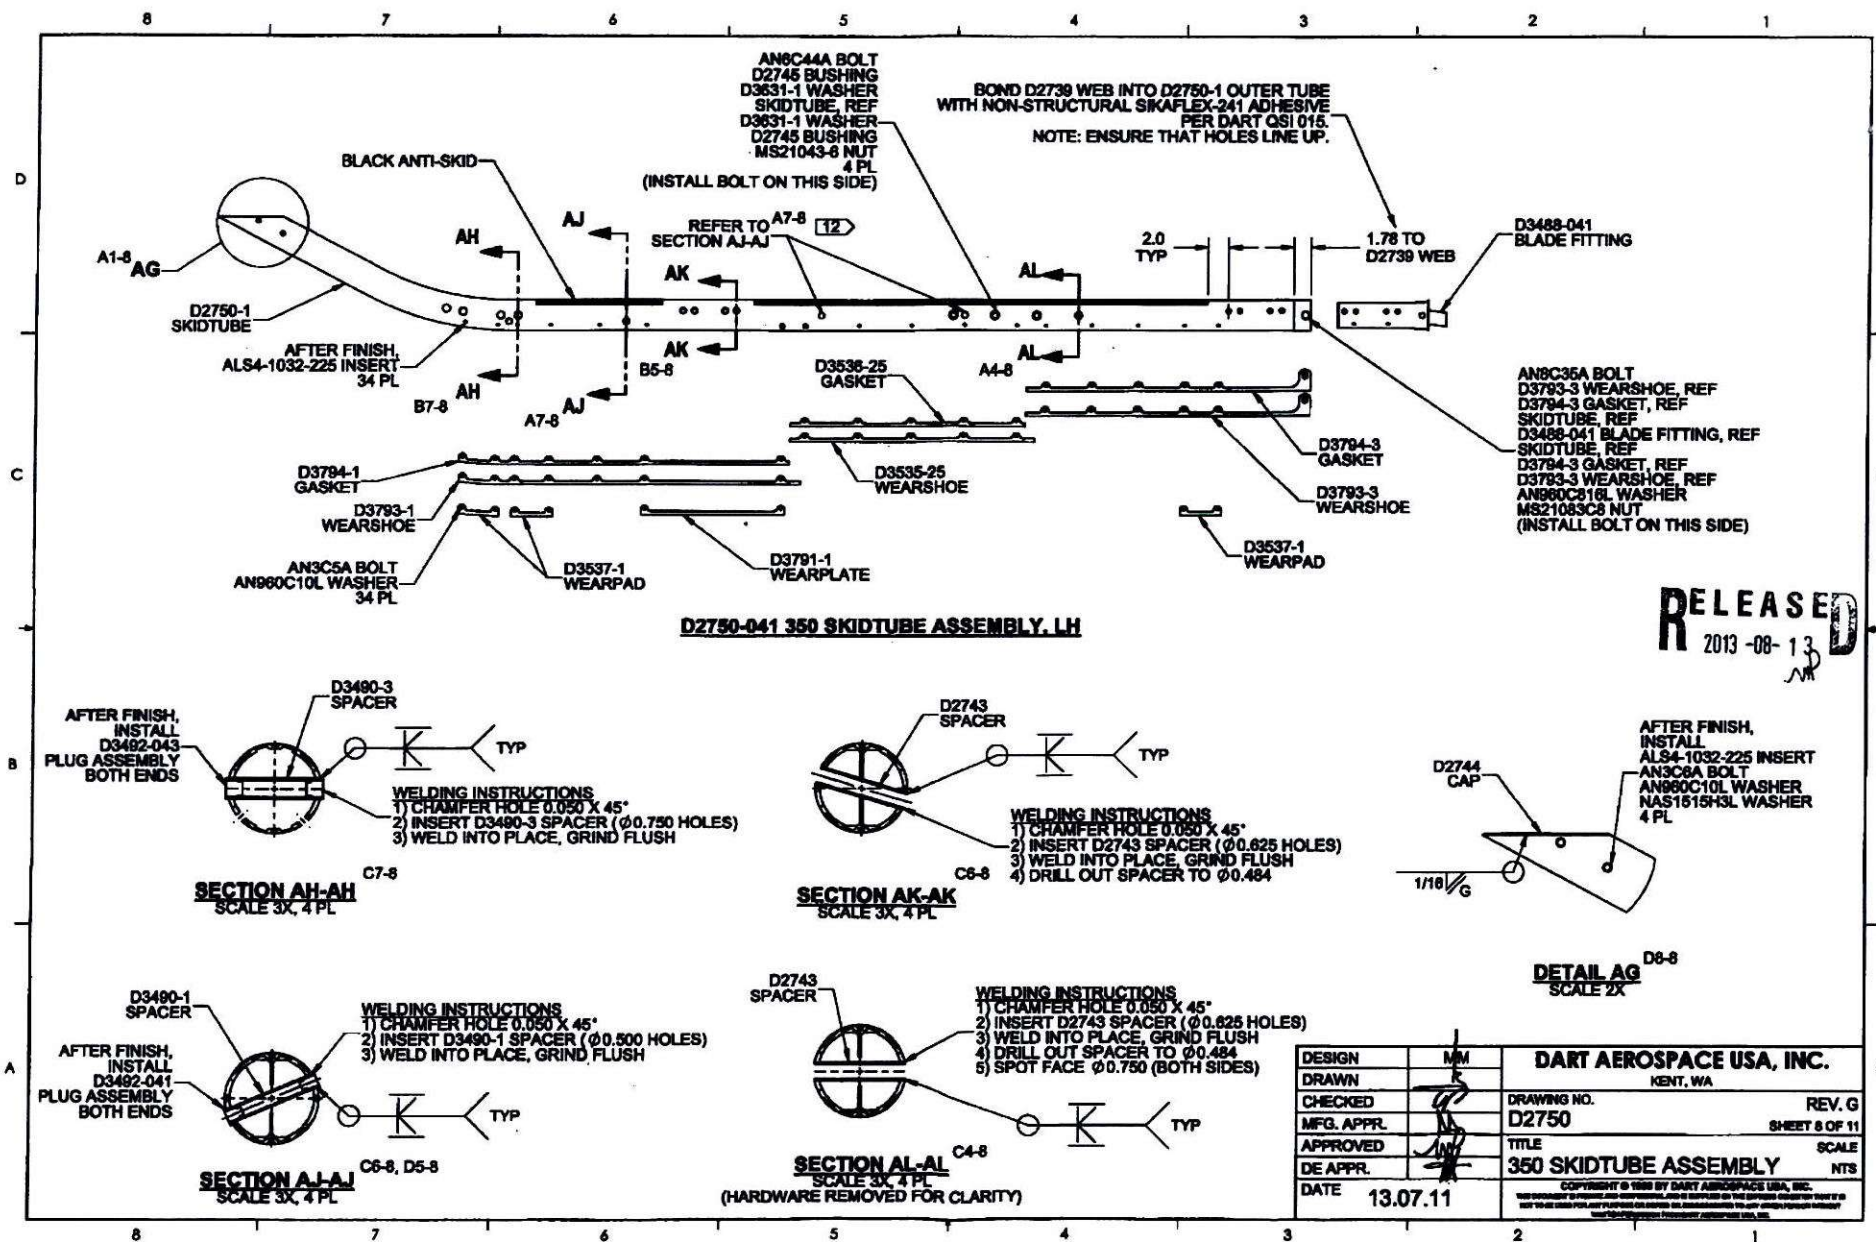

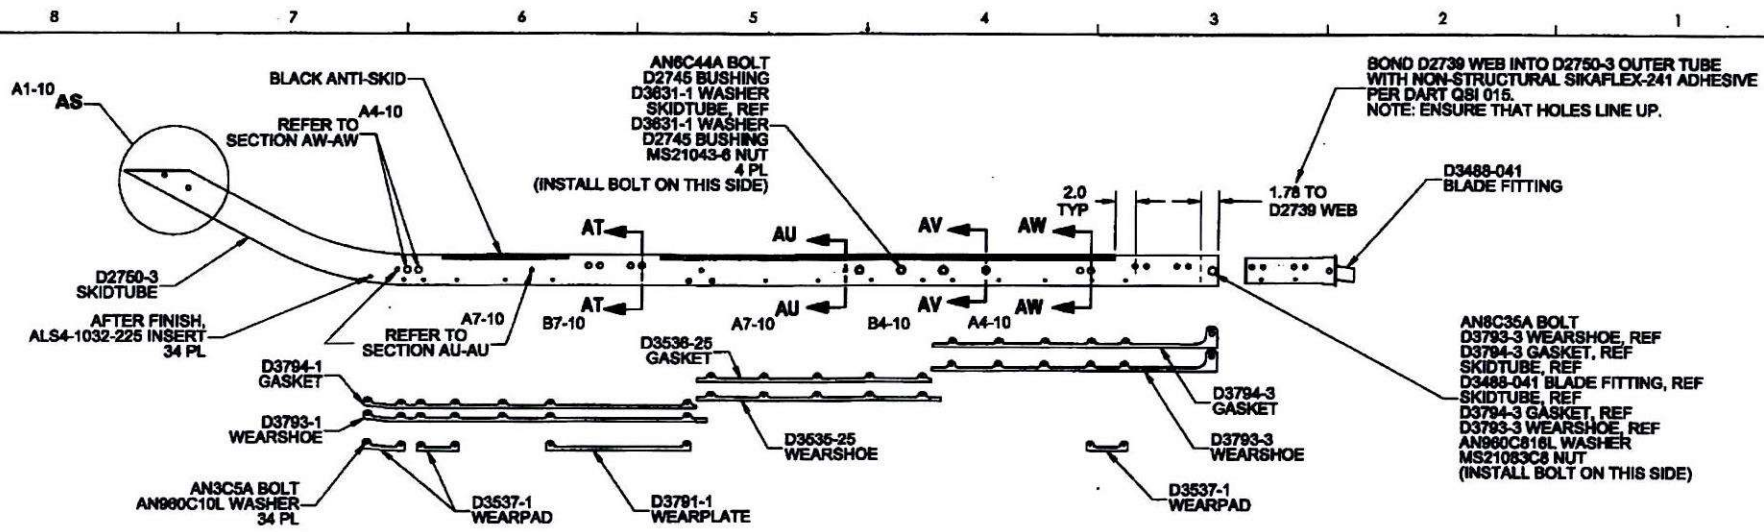


D2750-043 350 SKIDTUBE ASSEMBLY. LH

RELEASE
2013-08-13

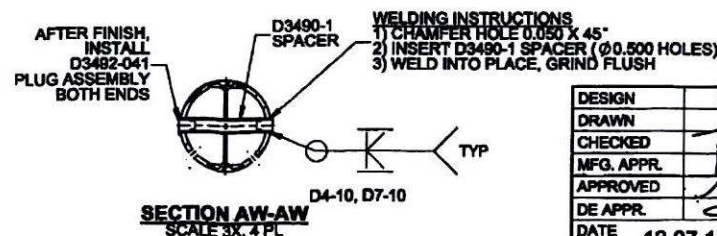
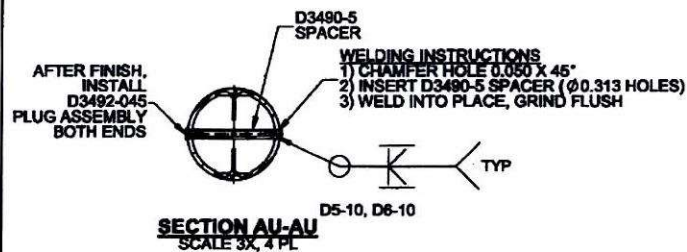
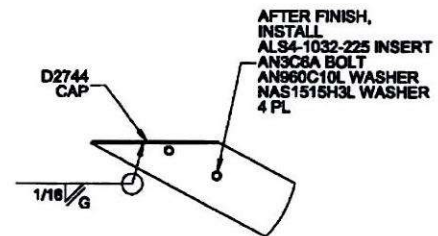
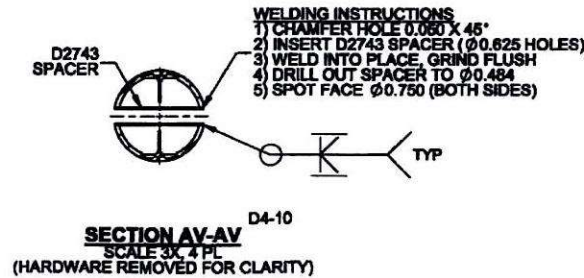
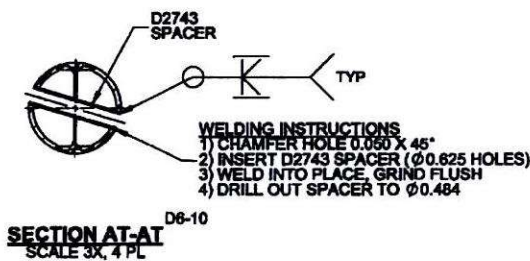


DESIGN	MM	DART AEROSPACE USA, INC.	
DRAWN		KENT, WA	
CHECKED		DRAWING NO.	REV. G
MFG. APPR.		D2750	SHEET 10 OF 11
APPROVED		TITLE	SCALE
DE APPR.		350 SKIDTUBE ASSEMBLY	NTS
DATE	13.07.11	COPYRIGHT © 1998 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS UNCLASSIFIED AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION FROM DART AEROSPACE USA, INC.	

8 7 6 5 4 3 2 1

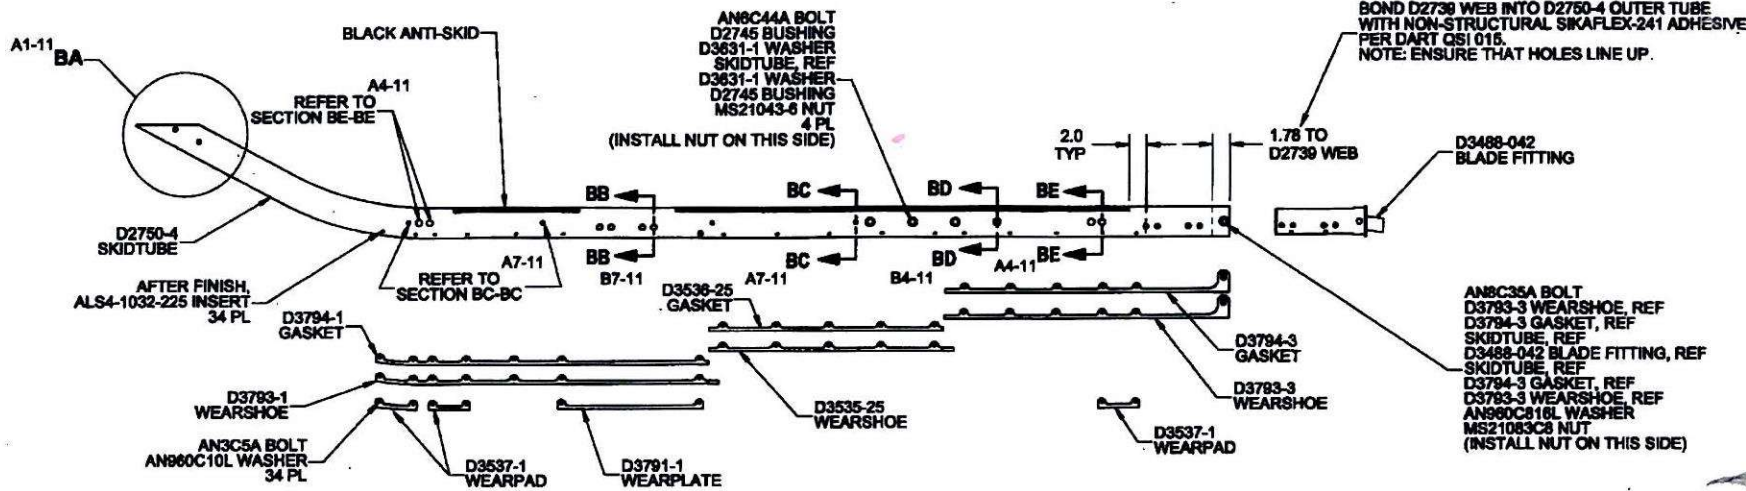

D2750-044 350 SKIDTUBE ASSEMBLY, RH

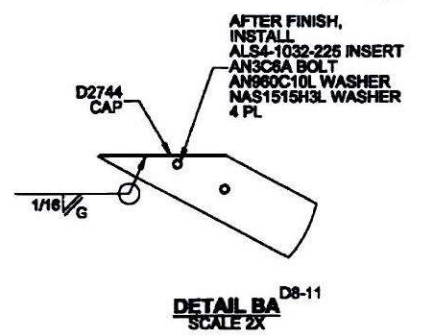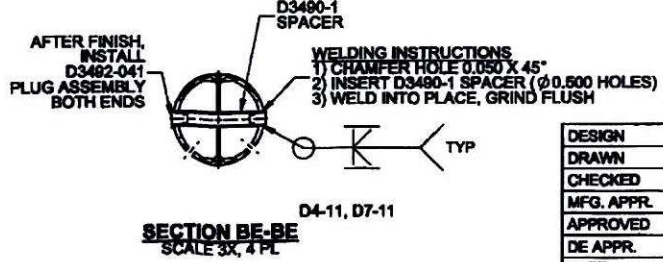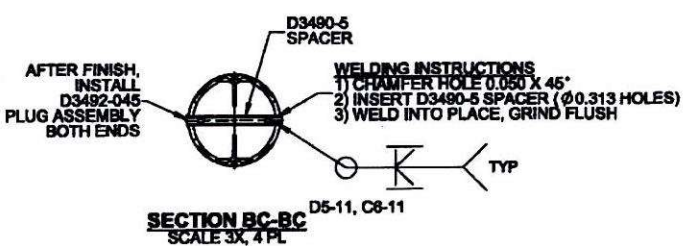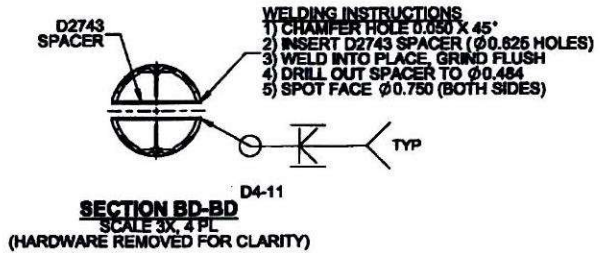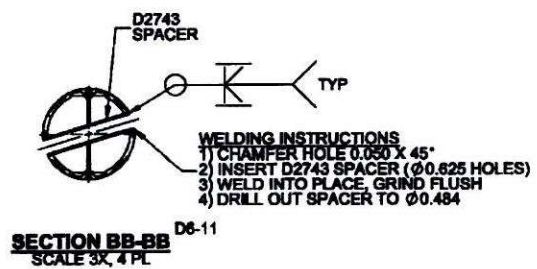

RELEASED
2013-08-13

DESIGN	MM	DART AEROSPACE USA, INC.	
DRAWN		KENT, WA	
CHECKED		DRAWING NO. D2750	REV. G
MFG. APPR.			SHEET 11 OF 11
APPROVED		TITLE	SCALE
DE APPR.		350 SKIDTUBE ASSEMBLY	NTS
DATE	13.07.11	COPYRIGHT © 1988 BY DART AEROSPACE USA, INC.	

PAGE 1 OF 1

Description: SKIDTUBE STD LH/RH, FLOAT COMPATIBLE

[illegible]